



PHOTOS MAY SHOW OPTIONAL OR CUSTOMISED EQUIPMENT.

## LINE TYPES



Double basic line




Double line combi




Edgeflex



Longflex



Chess



Rib line

## THERMOPLASTIC EXTRUSION AND SCREED APPLICATION WITH RIB FUNCTION

From city areas to urban and interurban roads, the BM 2700 can handle both smaller jobs and longer road stretches. The BM 2700 is an agile machine with excellent load abilities.

Equipped with the new generation of Borum's LineMaster computer, operating the machine is easy and convenient.

The BM 2700 has a one-seat slidable drive and operator section for flexible working on left or right side. Easy access and servicing of the machine through large doors to the engine room.

The thermoplastic Borum extruder can apply lines of 5 –40 cm width depending on the set-up. The extruder may be used for the application of various types of plain and profiled lines, single and double lines of different widths, as well as for simultaneous application of continuous and interrupted lines.

The screed equipment with rib function can apply flat lines, long flex, and rib over line in fixed prechosen line widths up to 30 cm.

# KNOWING THE BM 2700

## OPERATOR SECTION

Quick and easy change from side to side for marking left and right. Dual torque steering – good directional stability. Cruise control is a part of equipment.

## LINEMASTER COMPUTER

With the LineMaster Computer you can control up to 6 paint or spray guns, 6 bead guns and equipment with up to 24 shutters. Moreover, it controls all these various sets of equipment in this ONE unit.

## DIESEL TANKS

Allows for a full day's work.

## ENGINE ROOM

Easy access for service.

## CHASSIS



Solid double-frame construction

## MATERIAL TANKS

The possibility of an extra large material tank for major works ensures the most efficient workday and fast progression of the road works.

## THERMOPLASTIC EXTRUDER

## PRESSURIZED BEAD TANK

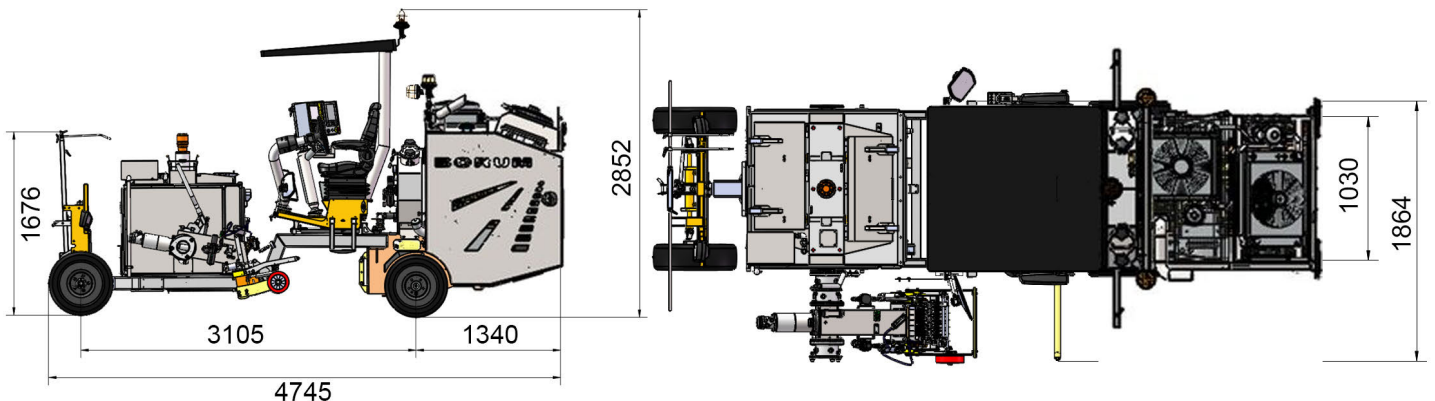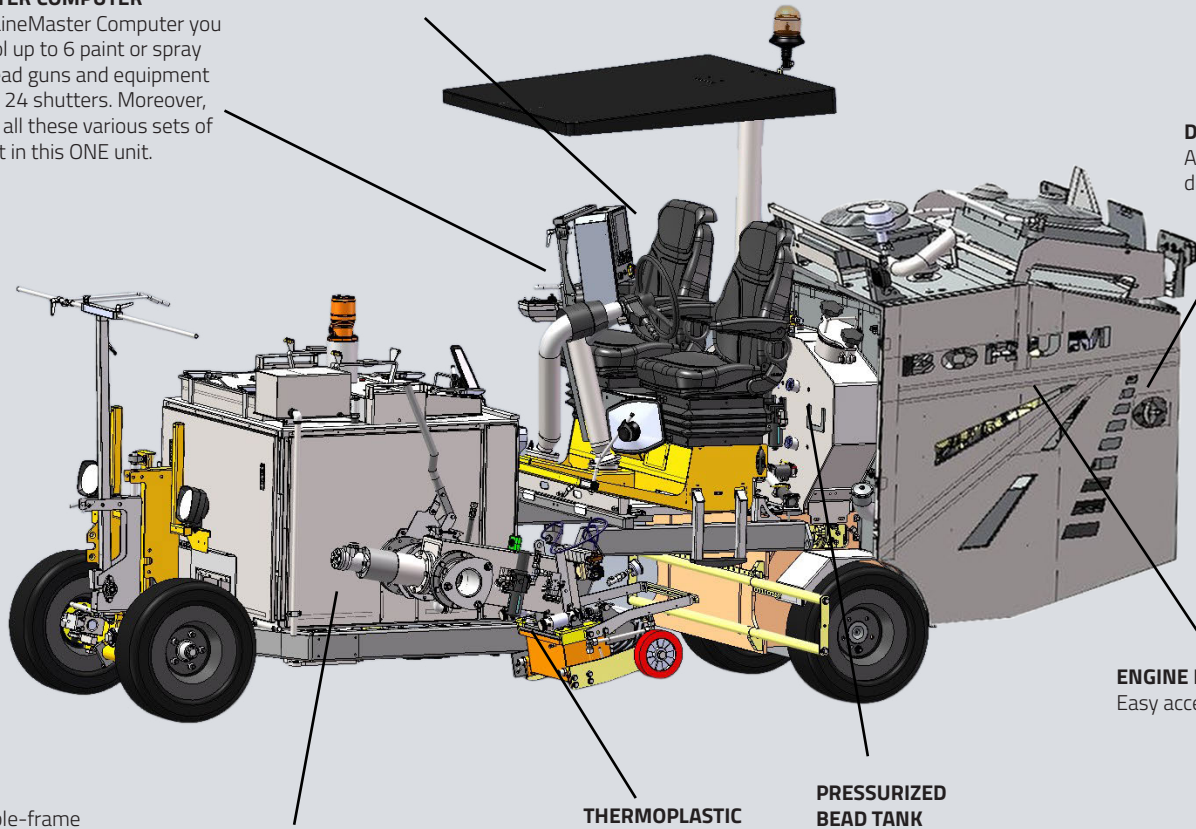


# TECHNICAL SPECIFICATIONS

ENGINE							
Manufacturer	Deutz						
Cooling	Water						
RatedPower	55 kW						
Cylinder	4 stroke 2900 cm³						
Type	Turbo (Diesel)						
Approval	EU Stage V (TIER 4)						
COMPRESSOR							
Compressor Capacity	Screw compressor 2400 L/min @ 10 bar. Integrated oil-cooling system. Air-cooler incl. water separator.						
FILLING CAPACITIES							
Fuel tank capacity	2x 60 L						
Hydraulic tank size	88 L						
Bead capacity	140 L/224 kg. Pressurized (max 1.5 bar)						
DRIVING PROPERTIES							
Drive angle	15° / 27%						
Turning radius	3.45 m						
Steering	Hydraulic dual torque steering						
TRANSMISSION							
Hydrostatic transmission	For variable speed, forward/backwards						
Speed	0-17 km/h						
ELECTRICAL SYSTEM							
Electrical system	24 V / 100 Amp						
CONTROL UNIT							
Borum LineMaster	Program up to 99 different line types. Organise lines in up to 30 marking programs. 8" display. Transfer of daily marking reports. Data about road marking jobs can be accessed online (optional).						
COLOUR							
Colour	Borum Yellow (Other colours available on request)						
DIMENSIONS							
Length	4750 mm						
Width	1180 mm without equipment						
Height	2520 mm						

# THERMOPLASTIC EXTRUDER

The working principle of the extruder lies in the extrusion of the hot thermoplastic material through the extruder shutters onto the road surface. This allows to switch between line types in seconds with a push of a button. No need for mechanical adjustment. The thickness of the line is controlled by the slot gap and the speed of the machine, coupled to the thermoplastic feed rate. Glass beads can be pre-mixed and/or automatically applied with glass bead guns.

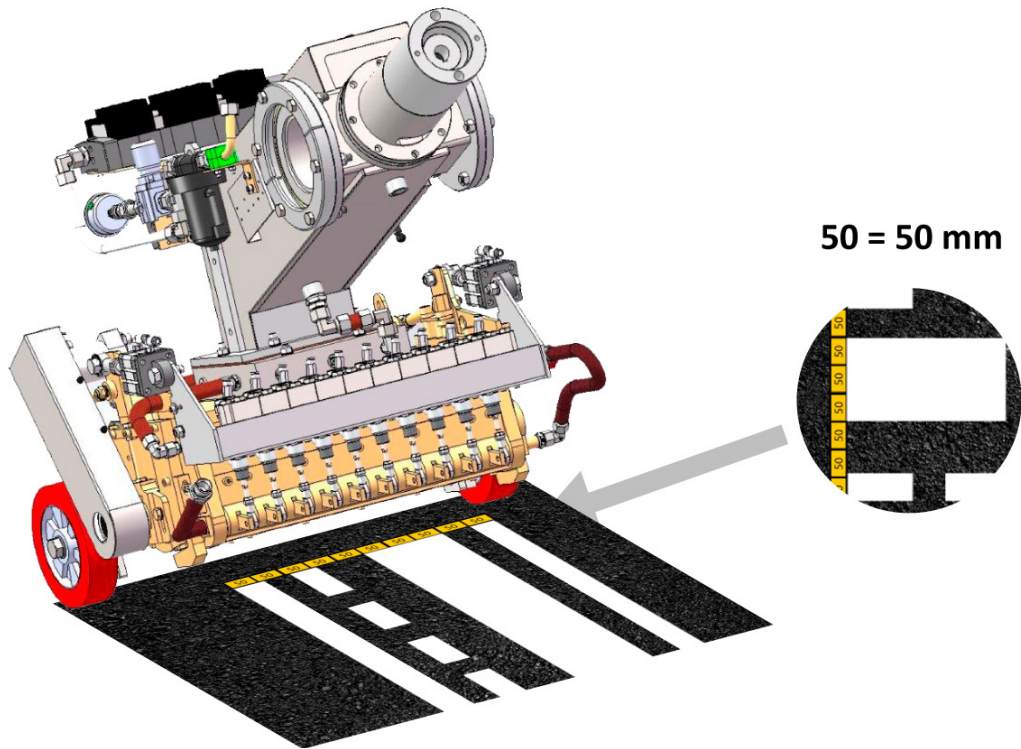

You can choose between thermoplastic extruder of 30 or 40 cm in total line width, built-up with 5 cm standard shutters (alternative shutter dimensions in the range of 4-10 cm for alternative line widths).

Effective heating of the complete unit using a centrifugal pump, 42 L/min, hydraulically driven. This ensures optimal performance and that the material does not stiffen and set inside the equipment.

Pneumatic lifting cylinder for up/down function, operation controlled from operator's seat.

Pneumatically controlled quick cleaning system for removal of solids left in the extrusion slot. It can be activated while extrusion is in process and is only slightly detectable on the line in the form of a moderate thickening of the layer.

The application speed varies according to the material, line type and width. Usual working speed is 3-6km/h but can go up to 8 km/h for some lines. Speed-dependent settings are possible.

## AUGER SCREW PUMP WITH CONTINUOUS RECIRCULATION SYSTEM


The transport of material from tank to extruder head is done by a hydraulically driven auger screw pump, which is electronically controlled. The screw pump has a permanent thermoplastic recirculation system which ensures a constant flow past the inactive extrusion shutters, keeping these clean and ready for opening. This avoids settling and catching of solid parts and prevents unnecessary wear of mechanical parts.

Build-in pressure regulating system ensures that line width and thickness does not change no matter the number of shutters involved in the current marking assignment.

# THERMOPLASTIC SCREED BOX WITH RIB

## FUNCTION

The screed box can apply flat lines, long flex, and ribs over a line in one pass. The Borum thermoplastic screed box is available in the following widths: 10, 12, 15, 20, 24, 25, 30 cm.

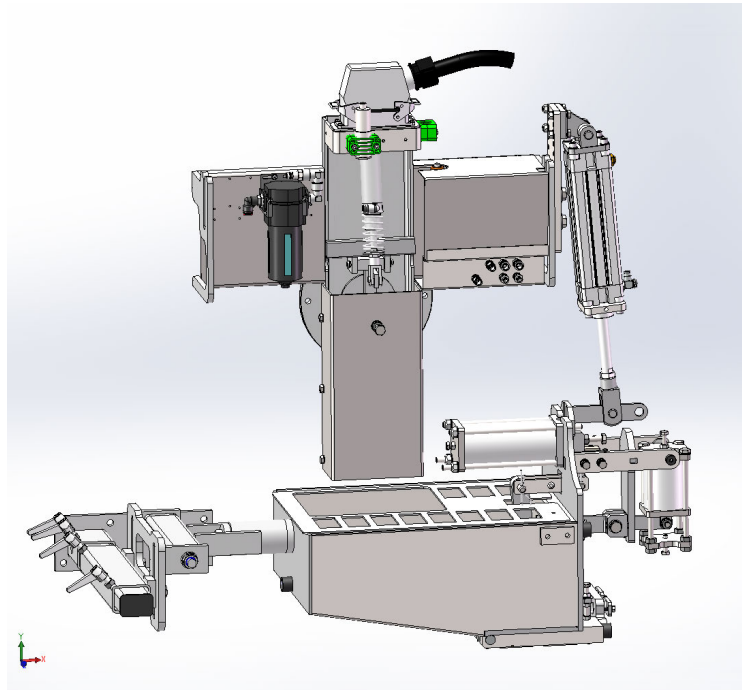

With this type of screed application, the box is dragged with constant contact to the surface. The contact points determine the line width. The material pressure is by gravity only and this is how the material is poured in the marking box. The material coming out of the box will fill up any holes, pores, or other types of road imperfections. This means that material consumption will depend on the road surface.

The screed box equipment is mounted directly on the side of the material tank.

The Borum thermoplastic screed box is available in the following widths: 10, 12, 15, 20, 24, 25, 30 cm. Other sizes are available upon request.

The equipment is constructed with one main application box covering a range of line widths, either 0 - 20 cm or 20 - 30cm. If you do not need to switch the line widths often, you have the option to only change the application opening based on your width requirements instead of changing the whole box! This makes the application equipment more cost-efficient!

The thickness for the application of flat lines is usually between 2 - 4 mm.

The usual application speed for applying ribs over a flat line is 1-3 km/h, while for screed application of flat lines it is up to 5 km/h.

## RIB LINE FUNCTION


The screed box is also equipped with a rib function. This allows you to apply ribs over a line in one pass. The total height of line with rib is usually between 8 to 15 mm depending on the material. The base line is recommended to be as thin as possible when combined with ribs (approx. 1,5 - 2 mm).

## LASER SENSOR FOR MEASURING AND REFILLING MATERIAL

The equipment is supplied with a laser that constantly measures the material level in the application box. If the material level becomes lower than 50%, the application box will be automatically refilled.



# NON-PRESSURIZED THERMOPLASTIC TANK

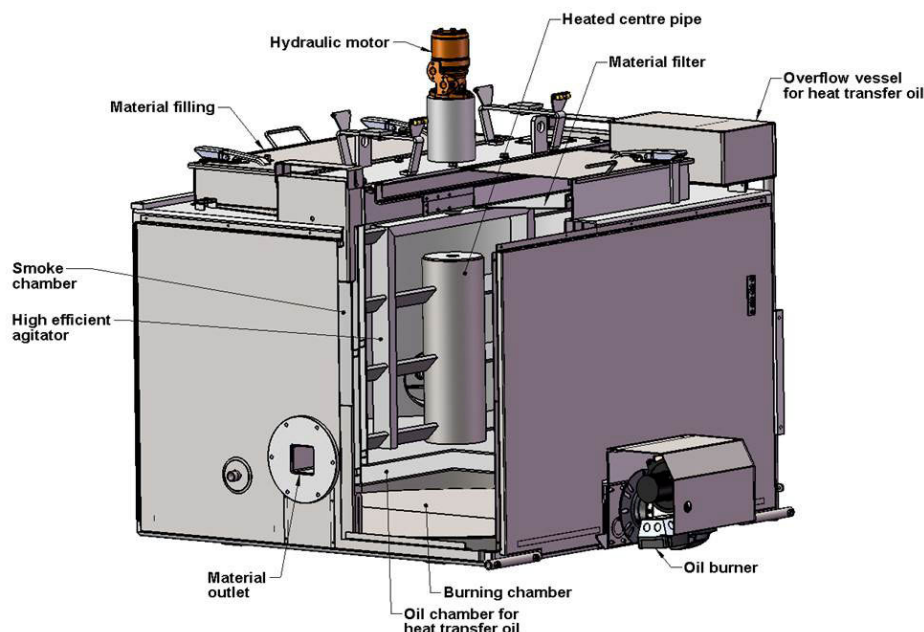

Non-pressurized thermoplastic tank, indirectly heated via heat transfer oil. The thermal oil and thermoplastic material temperature is thermostatically controlled and regulated automatically according to the settings

## BURNER SYSTEM

Diesel burner system for heating of the thermal oil (and thermoplastic). Propane burner is available on demand.

## VERTICAL AGITATOR (MIXER)

With hydraulic transmission. Heated center pipe for efficient uniform temperature control. Perfect melting & homogenization of the thermoplastic. Stable construction with foundation and bearings at the top of the material tank.

## FEATURES OF LINEMASTER AND MACHINEMASTER

The Borum LineMaster control unit is an easy way of setting and controlling your line marking jobs. The LineMaster is attached to the operator's section of the machine and gives you full control of all your line marking tasks, from line application and pre-marking to reporting and invoicing.

It is possible to store up to 99 different line types, and to arrange these in up to 30 different marking programs. You are also able to pre-set line widths, line types and different combinations to have them ready for marking, and can instantly adjust them on the go.


In the MachineMaster computer, you are able to view the status of various parts of the machine (e.g. compressor) on the computer screen that will help with correctly maintaining the machine and avoiding break downs.



## THERMOPLASTIC MATERIAL ADVANTAGES

Thermoplastic material has a long-life duration with high retro-reflectivity capabilities due to being able to pre-mix glass beads in the material. Thermoplastic markings cure quickly and adhere strongly to the road surface. Generally, thermoplastic is recommended for areas with high traffic density and/or areas with low lighting as e.g. highways.


The rib line equipment is a good solution if you are only going to work with flat fixed-line width markings and rib line application.

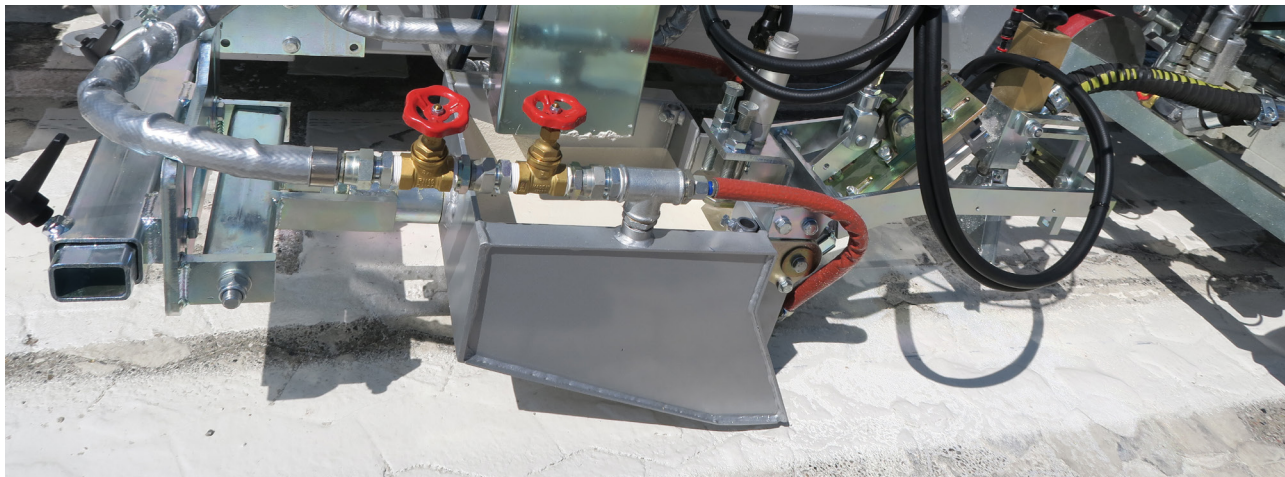

## THERMOPLASTIC FEATURES

Thermoplastic is a durable material that cures quickly and adheres strongly to the road surface. It can be used for applications of both flat lines (also known as type 1 lines) or of thick profiled lines and markings (also known as type 2 lines).

This type of material is used on various types of roads, but you will often see it on highways or motorways as it can withstand high traffic density, it has a high visibility at night and during wet conditions and glass beads can be mixed in for enhancing visibility.

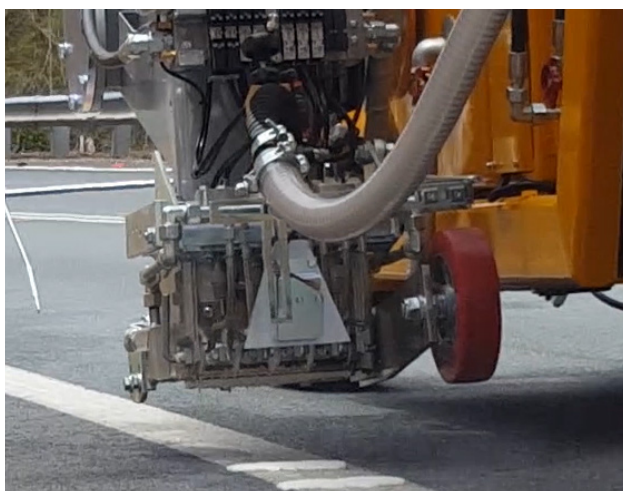

### TYPICAL USES:

Rib Line is typically used on the edge of roads in order to alert drivers running off course.



### LEARN MORE

Find out more in the Borum Knowledge Lab.



# ADDITIONAL EQUIPMENT

The additional equipment can be mounted on the machine according to your requirements. They are not necessary for the running of the machine but add to the comfort of the machine driver or to the functionality of the machine.



**Ejector filling of bead tank**



**Sunshade with 1 rotating light**




**Cruise control**



**BM Online**



**Bead alarm mounted on bead gun**



**Bar with pneumatic lift for mounting warning lights**  
(Comes without lights)



**Pre-marking system with paint gun**



**Cone holder**



**Pointer turning with steering**  
With hydraulic lifting system



**Remote control for BM Lin-eMaster**



**Air drier for bead tank**



**Fixed pointer**  
With hydraulic lifting system



**Pre-marking system with paint can**



**Airknife**



**Hydraulic broom**



**Quick shift**